

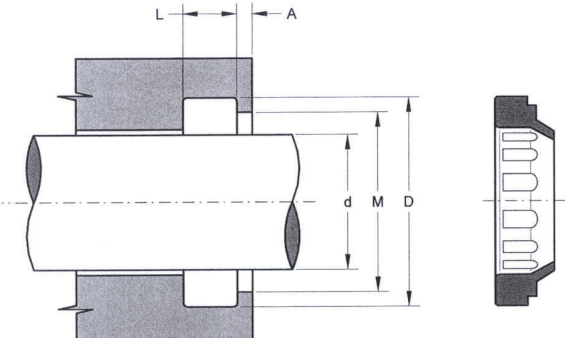
Pyyhkijät

R08

SAG

PU/NBR

PU/NBR

	<p><b>Toleranssit:</b>                  ØD: +/- 0,1    Ød: f7    L: +0,10/0</p> <p><b>Materiaali:</b>                  NBR 90° Shore A (R08)                  Polyuretaani 94° Shore A (PWF/GHP/SAG)</p> <p><b>Käyttöolosuhteet:</b>                  Lämpötila: -40 °C ... +100 °C                  Nopeus : &lt; 4 m/s</p>
---	--

<u>Nimike</u>		<u>d</u>	<u>D</u>	<u>L</u>	<u>1 kpl</u>	<u>100 kpl</u>
SAG20	PU	20	28	4/7	8,83	7,68
SAG25	PU	25	33	4/7	11,94	10,38
SAG28	PU	28	36	4/7	10,86	9,44
PWF30	PU	30	38	4/7	11,45	9,96
SAG32	PU	32	40	4/7	11,45	9,96
SAG35	PU	35	43	4/7	12,01	10,45
SAG36	PU	36	44	4/7	12,01	10,45
SAG40	PU	40	48	4/7	5,07	4,41
GHP45	PU	45	53	4/7	13,43	11,67
SAG50	PU	50	58	4/7	15,34	13,34
SAG56	PU	56	64	4/7	17,27	15,02
PWF60	PU	60	68	4/7	17,27	15,02
SAG70	PU	70	78	4/7	17,27	15,02
PWF80	PU	80	88	4/7	19,17	16,67
PWF85	PU	85	93	4/7	19,17	16,67
GHP90	PU	90	98	4/7	21,08	18,33
SAG100	PU	100	108	4/7	27,28	23,72
GHP110	PU	110	122	5,5/10	31,67	27,54
					0,00	0,00
R0822/30X4X7	NBR	22	30	4/7	4,88	3,25
R0825/33X4X7	NBR	25	33	4/7	5,09	3,39
R0830/38X4X7	NBR	30	38	4/7	5,92	3,95
R0840/48X4X7	NBR	40	48	4/7	6,61	4,41
R0845/53X4X7	NBR	45	53	4/7	7,60	5,07
R0856/64X4X7	NBR	56	64	4/7	8,76	5,84
R0860/68X4X7	NBR	60	68	4/7	10,04	6,69
HLP8-160	NBR	160	172	5,5/10	43,04	28,69
HLP8-250	NBR	250	265	6,5/13	84,93	56,62

Huom! Toimitusohjelmassa myös paljon muita kokoja. Tarjous pyydettyessä.