




## CROSSED ROLLER SLEWING RINGS – with external gear

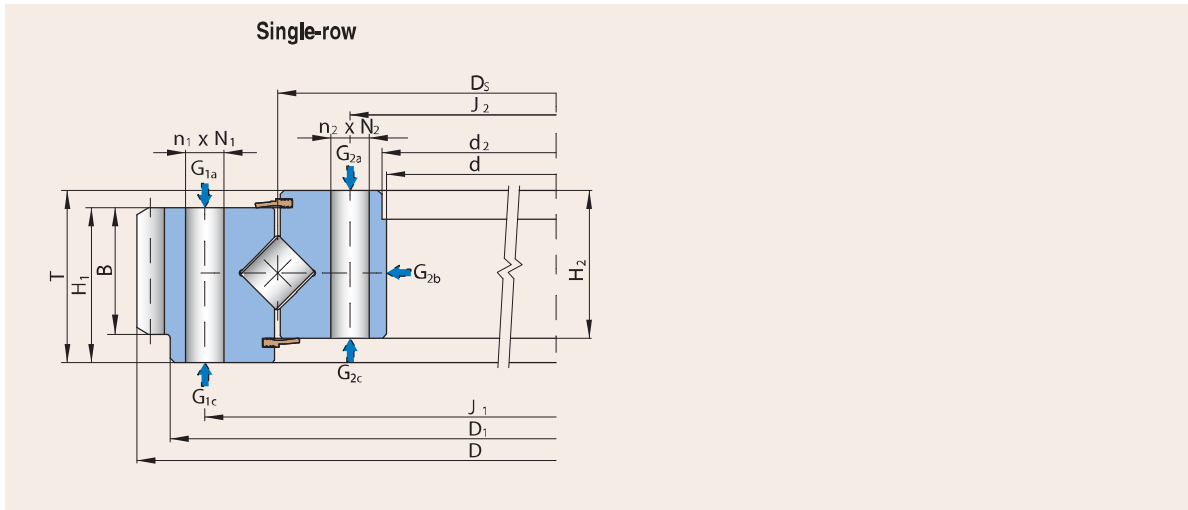

### Single-row

Boundary Dimensions			Designation	Weight	Abutment Dimensions				Mounting Holes N <sub>1</sub>		Mounting Holes N <sub>2</sub>	
d	D	T			G	J <sub>1</sub>	J <sub>2</sub>	N <sub>1</sub>	N <sub>2</sub>	Number n <sub>1</sub>	Hole Type	Number n <sub>2</sub>
[mm]			[kg]	[mm]								
140	300	36	9E-1Z12-0215-0694	11	258	170	M16	18	12	C	12	A
180	342	42	9E-1Z14-0254-0110	14.5	300	210	13	M12	24	A	(24-3)	C
180	342	42	9E-1Z14-0254-0862	14.5	300	210	13	M12	24	A	(24-3)	C
234	403.5	55	9E-1Z20-0309-0765	23	358	259	13	13	24	A	(28-1)	A
234	403.5	55	9E-1Z16-0310-0111-3	27	358	259	M12	M12	24	C	20	C
235	403.5	55	9E-1Z16-0310-0517	24	358	259	13	13	24	A	(28-1)	A
300	460	85	9E-1Z25-0384-18-1	45	430	323	M16	13	16	D	(20-1)	A
340	579.8	90	9E-1Z30-0461-0119	86	515	380	M20	22	20	D	(22-1)	A
340	579.8	90	9E-1Z30-0461-0126	86	515	380	M20	M20	20	D	(22-1)	D
344	503.3	56	9E-1Z14-0414-0635	27	455	368	M12	14	20	D	24	A
380	589.5	75	9E-1Z20-0474-0100	67	540	410	M16	17	18	D	18	A
390	664	85	9E-1Z30-0505-0597	102	578	432	22	M20	30	A	(30-1)	E
390	654	85	9E-1Z30-0508-0236	98	582	432	22	22	30	A	(30-1)	A
468	695	78	9E-1Z25-0576-1322	88.5	640	508	18	18	36	A	(36-1)	A
470	708	83	9E-1Z25-0575-1044	93	640	508	17	17	36	A	(36-1)	A
573	816	90	9E-1Z25-0675-0145	120	753	604	22	22	18	A	18	A
573	838	90	9E-1Z25-0675-1045	132	753	604	22	22	36	A	(36-1)	A
634	846	75	9E-1Z20-0730-1198	102	795	667	M16	M16	18	D	18	D
634	846	75	9E-1Z20-0730-0101	102	795	667	M16	17	18	D	18	A
715	979	100	9E-1Z30-0823-15	180	893	753	22	22	18	A	18	A
715	979	100	9E-1Z30-0823-15-2	183	893	753	22	22	18	A	18	A
715	979	100	9E-1Z30-0823-37	177	893	753	22	22	18	A	18	A
715	979	100	9E-1Z30-0823-80	172	893	753	22	22	36	A	(36-1)	A
715	979	100	9E-1Z30-0823-1250	176	893	753	22	M20	36	A	36	E
868	1144	100	9E-1Z30-0980-16	230	1050	910	22	22	18	A	18	A
890	1080	82	9E-1Z25-0984-0452	125	1010	922	M16	M16	30	D	36	E
890	1089	90	9E-1Z25-0980-0294	141	1015	922	M16	18	30	D	30	A
985	1270	115	9E-1Z30-1110-0710	301	1185	1034	22	22	36	A	36	A
1084	1476	110	9E-1Z40-1250-0263	475	1350	1150	26	26	24	A	28	A
1206	1604	130	9E-1Z45-1390-0841	635	1500	1280	30	30	48	A	(48-1)	A
1330	1591.7	115	9E-1Z25-1468-1251	377	1512	1400	M20	M20	40	D	40	E
1362	1590	111	9E-1Z30-1473-78	284	1510	1398	M22	M22	40	D	40	E
1430	1808	141	9E-1Z40-1584-26	772	1671	1485	M27	33	30	D	30	A
1430	1808	141	9E-1Z40-1584-26-3	772	1671	1485	M27	33	30	D	30	A
1530	1967.9	130	9E-1Z50-1722-1238	920	1850	1590	32	32	48	A	48	A